

ТЕХНИЧЕСКИЕ ДАННЫЕ :

Класс изоляции : F Степень защиты : IP 68 Максимальная температура жидкости : 35 °C

Насос / Двигатель Скорость : 2850 об / мин

Маркировка N)

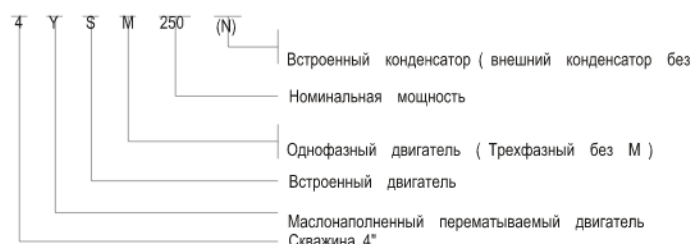


ТАБЛИЦА ЭФФЕКТИВНОСТИ :

МОДЕЛЬ	P 2		N ≈ 2850 л / мин					
	КВт	Напряжение (В)	Ph	Cos Φ	η (%)	Δ (мм)	ВЕС (кг)	
		220-240 В	1					
4YSM250	0.25	0.33	2.5	0.93	52	336	5.5	
4YSM370	0.37	0.5	3.7	0.93	54	346	6.7	
4YSM550	0.55	0.75	4.7	0.93	57	356	7.3	
4YSM750	0.75	1	6.2	0.93	60	381	8.7	
4YSM920	0.92	1.25	6.6	0.93	64	411	9.8	
4YSM1100	1.1	1.5	8.0	0.93	63	421	10.6	
4YSM1300	1.3	1.75	9.0	0.93	64	441	11.7	
4YSM1500	1.5	2	10.5	0.93	65	484	12.9	
4YSM1800	1.8	2.5	13.0	0.93	65	524	15.7	
4YSM2200	2.2	3	15.0	0.93	66	549	17.7	
4YSM2600	2.6	3.5	17.8	0.93	67	599	19.8	

МОДЕЛЬ	P 2		N ≈ 2850 л / мин												
	КВт	Напряжение (В)	Ph	In (A)	Cos Φ	η (%)	Δ (мм)	ВЕС (кг)							
		380-415 В	3												
	0.33	0.5	0.75	1.1	1.5	2.3	3.5	4.5	5.5	7.0	7.5	10	10		
4YS250	0.25			1.0	0.75	55	316	5.8							
4YS370	0.37			1.4	0.75	58	336	6.7							
4YS550	0.55			1.8	0.76	61	346	7.3							
4YS750	0.75			2.5	0.77	64	366	8.0							
4YS1100	1.1			3.2	0.78	67	381	9.8							
4YS1500	1.5			4.0	0.79	69	441	11.7							
4YS2200	2.2			6.0	0.80	71	524	15.7							
4YS2600	2.6			7.0	0.79	71	540	17.7							
4YS3000	3			8.0	0.81	72	587	19.8							
4YS3700	3.7			9.5	0.80	72	612	21.4							
4YS4000	4			10.0	0.82	74	712	23.7							
4YS5000	5.0			12.0	0.81	75	732	25.5							
4YS5500	5.5			12.0	0.83	75	762	28.0							
4YS7000	7			14.0	0.82	76	837	30.0							
4YS7500	7.5			15.0	0.84	76	992	34.0							