

ТЕХНИЧЕСКИЕ ДАННЫЕ :

- Насос / Двигатель Скорость : 2850 об / ми

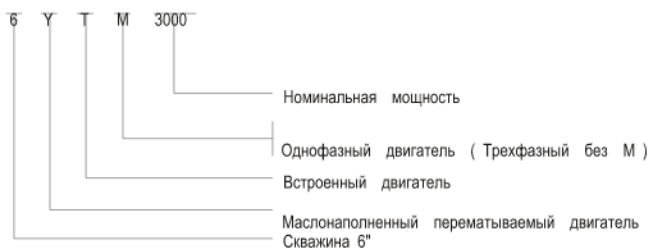


ТАБЛИЦА ЭФФЕКТИВНОСТИ :

МОДЕЛЬ	P 2		N ≈ 2850 л / мин						
	КВт	HP	Напряжение (В)	Ph	In (A)	Cos φ	η (%)	L (мм)	ВЕС (кг)
			220-240 В	1					
			380-415 В	3					
6УТМ 1500	1.5	2			11.5	0.93	65	569.5	22.8
6УТМ 2200	2.2	3			15.5	0.93	67	627.5	24.9
6УТМ3000	3	4			22.5	0.93	67	653.5	28.1
6У Т М 4000	4	5.5			29.5	0.93	68	703.5	33.9
6У Т М 5000	5.5	7.5			37.5	0.93	69	763.5	40.2
6УТ 1500	1.5	2			4.5	0.80	72	549.5	21.3
6УТ 2200	2.2	3			6.5	0.80	73	569.5	23
6У Т3000	3	4			7.8	0.80	74	627.5	25.1
6У Т4000	4	5.5			10.0	0.80	75	653.5	28.9
6У Т5500	5.5	7.5			13.7	0.80	76	703.5	33.9
6У Т7500	7.5	10			17.3	0.81	76	763.5	40.2
6У Т9200	9.2	12.5			21.3	0.81	77	853.5	46.5
6У Т11000	11	15			25.1	0.82	78	913.5	53.5
6У Т15000	15	20			31.6	0.83	79	1013.5	67.7